


CUSTOMER DATASHEET


Printed: 09/11/2023


Product Management
Transportation Europe

Central Article Code: DB8100W01-A Created: 06/09/2005

Local Code: EG1355 Modified: 01/06/2020

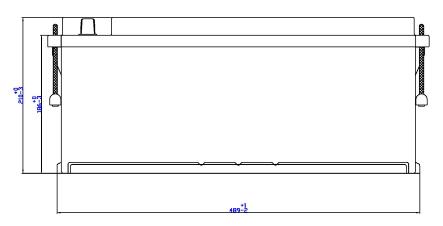



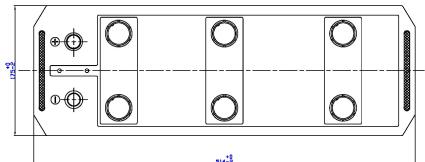

Final Outlook DB801-A Approval date 01/10/2005

PERFORMANCES		
Voltage (V):	12 V	
C20 (Ah):	135.0	20 h
Cranking (A):	1000	EN
Charge:	WET	
Technology:	Vented/Flooded	
Grid:	Hybrid	
Vibration:	\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\	

 Vibration:
 V2 (30Hz+/-2Hz/6g/2h)

 Endurance:
 E2 (90 cycles@50%)

STD. DIMENSIONS

 Length (mm \pm 2):
 514

 Width (mm \pm 2):
 175

 Height (mm \pm 2):
 210

 Total Weight (kg \pm 5%):
 36.00

All figures show nominal values. Tolerances are according to EN50342 and applicable European Regulations.

Type: DB8 BLACK

Hold Down: B3 H.D. Adapter: No

COVER

CONTAINER

Type: DIN BLACK

Polarity: ETN 3

Terminals: EN taper post

Terminal Adapter: No SOCI: No

Ventilation: Independent

Filter: No Lateral Plug: No

PLUGS

Type: 6 x M27 BLACK

HANDLES

Type: 2 x Rope (Rigid holder) BLACK

OTHERS

Degassing Tube: No

Used for BOSCH